Jameco Part number 148582

DIMENSIONS

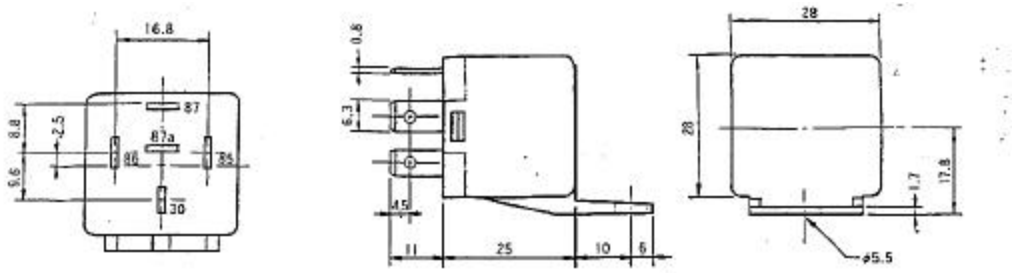

WIRING DIAGRAM

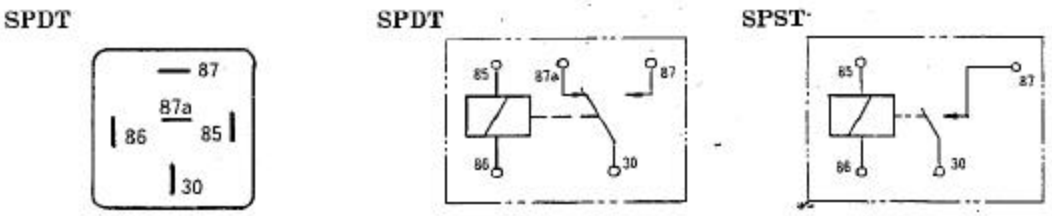

CONTACT RATING

	Load	F Type
Resistive (Cos. È=1)	DC 12V	30A

GENERAL DATE

Insulation Resistance	50 Megohms min. at 500 VDC.
Breakdown Voltage	500 VRMS, 60 Hz between contact, 1,000 VRMS, 60Hz between all elements
Contact Material	Silver-Cadomium Oxide as standard.
Contact Resistance	100 milliohms max. (Initial)
Coil Data	See chart. (at 25 °C)
Max. Allowable Voltage	110% nominal
Min. Drop-out Voltage	10% of nominal
Pick-up Time	10 msec max.
Drop-up Time	10 msec max.
Temperature Range	-30 °C~+85 °C
Expected Life	With operation rate 30/min. Mechanical -- 5,000,000 operations min.